


Sinwan AC Alarm Fan Programmable CPU AC Power Alarm Output Characteristic & Wiring Diagram

1. Outlet

Sinwan AC Alarm Fan

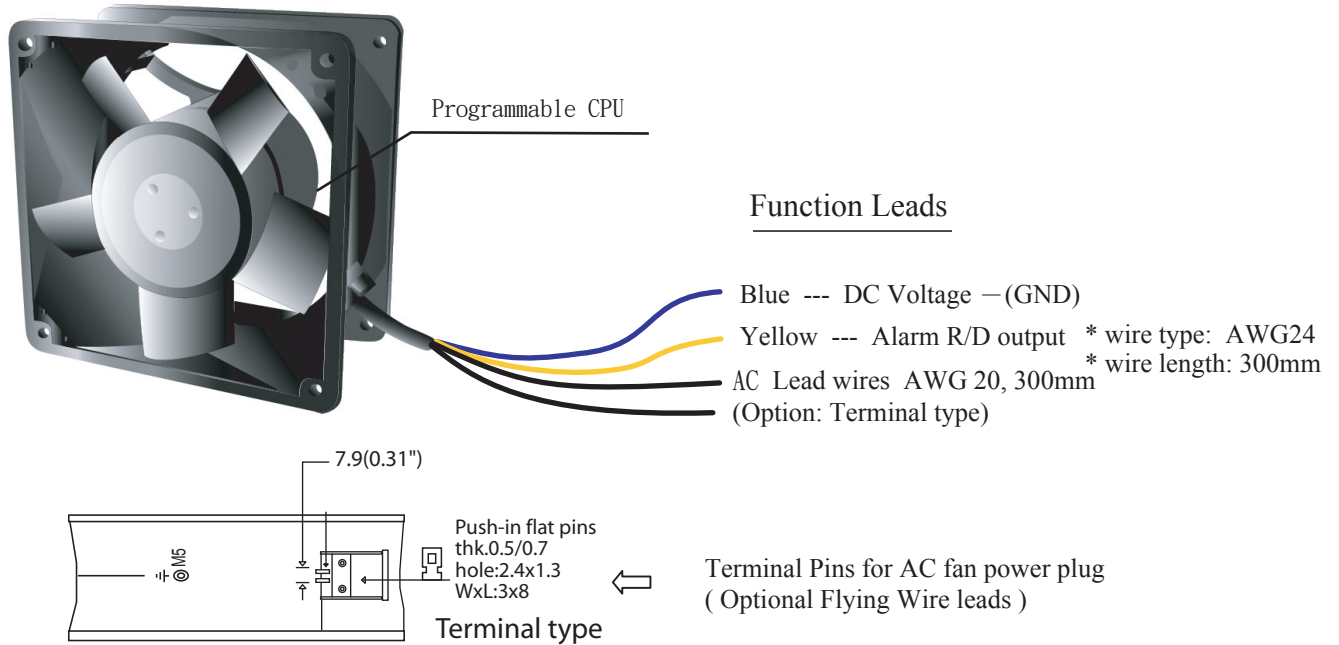

2. Programmable CPU AC Power Alarm output signals (R/D)

Output signal : I_c 20mA Max.

V_{cc} 28VDC Max.

- * Action Entry : **High Speed** : Abnormal (<2000+- 200RPM) Slow, High
Normal (>2000+- 200RPM) Running, Low
- Medium Speed** : Abnormal (<1500+- 200RPM) Slow, High
Normal (>1500+- 200RPM) Running, Low
- Low Speed** : Abnormal (<900+- 200RPM) Slow, High
Normal (>900+- 200RPM) Running, Low

(We can follow the fan abnormal speed alarm as customer request)

We can follow the fan abnormal speed alarm as customer request.

* Logic Level : Low on Pass. High on Fail (Standard opencollector type)

Low on Fail. High on Pass , customer available on request

* Fan abnormal speed alarm, motor slowing down, alarm output, open collector or TTL available

